

Dehumidifier Consorb **CZ-82, 102, 102L, 104 ICE**



Dehumidifying capacity at 20°C / 60%RH

23,5 - 69 kg/h

Dry air flow


8000 - 12000 m³/h

- Highly efficient D-MAX rotor
- No desiccant carry-over
- Suitable for high ambient water contents
- Long lifetime
- Process fan equipped with frequency converter as standard
- High dehumidifying capacity at low moisture contents




Section of a dehumidifier rotor from Seibu Giken. The high number of channels means that moisture is adsorbed with extra efficiency.

World leaders in dehumidification.

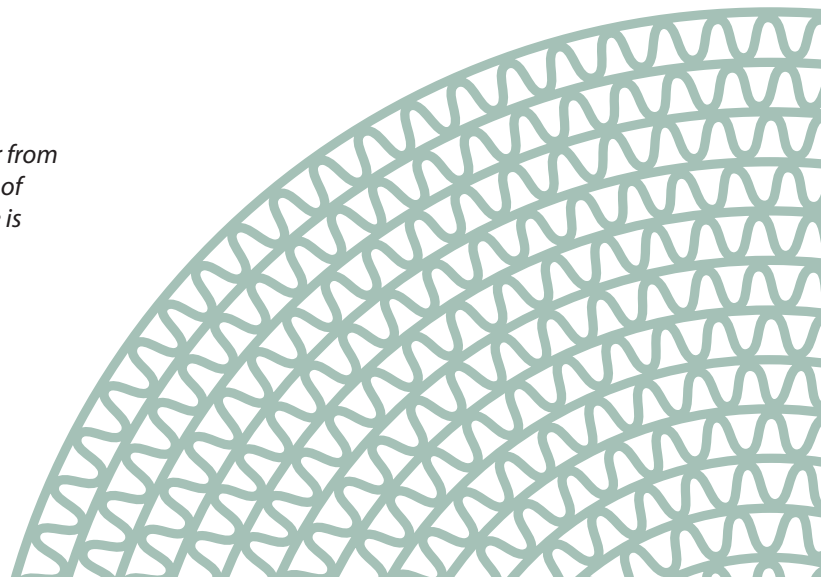

TECHNICAL DATA

Dehumidifier model ICE	CZ-82	CZ-102	CZ-102L	CZ-104
Nominal capacity ¹ (kg/h)	23	39	55	69
Dry air flow ² (m³/h)	8000	12000	12000	10000
at static pressure (Pa)	200	200	200	200
Wet air flow ² (m³/h)	850	1400	2000	2500
at static pressure (Pa)	200	200	200	200
Heater power ³ (kW)	30	50	74	95
Max. electric consumption (kW)	36,6	59	83,7	106,5
Supply fuse 3x400V 50Hz (A)	63	100	160	200
Weight (kg)	300	380	400	560

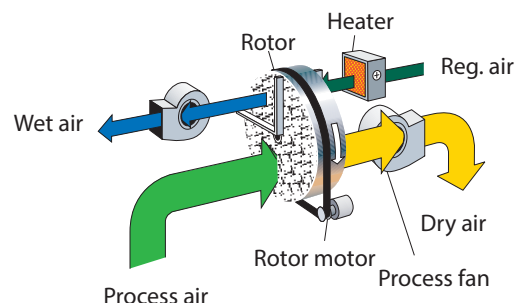



1. Valid for inlet conditions 20°C/60%RH. For other inlet conditions the capacity can be calculated by using the diagram shown below.
2. Volume flow for density 1.20 kg/m³.
3. Electric reactivation heater is standard. Steam and hot water is optional.

CAPACITY TABLE

Capacity (kg/h)	10°C			15°C			20°C		
	30%RH	50%RH	70%RH	30%RH	50%RH	70%RH	30%RH	50%RH	70%RH
CZ-082 ICE	15,0	19,0	22,0	17,0	21,0	23,0	18,5	22,0	23,5
CZ-102 ICE	24,0	32,0	36,0	28,0	35,0	39,0	31,0	37,0	39,0
CZ-102L ICE	27,0	40,0	49,0	34,0	47,0	54,0	40,0	51,0	55,0
CZ-104 ICE	25,0	41,0	57,0	34,0	55,0	67,0	46,0	64,0	69,0

DIMENSIONS

Subject to change without notice. Download installation drawing at www.dst-sg.com

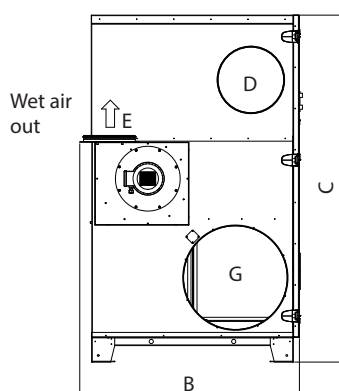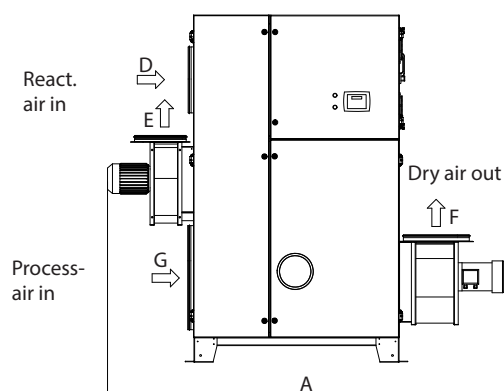

CZ	82	102	102L	104
A	2485	2680	2615	2915
B	1060	1265	1265	1265
C	1905	2105	2105	2105
D	Ø250	Ø400	Ø400	Ø400
E	Ø160	Ø315	Ø315	Ø315
F	786X306	880X338	880X338	880X338
G	Ø400	Ø630	Ø630	Ø630

Updated 19.05



Sweden | +46 8 445 77 20
info@dst-sg.com | www.dst-sg.com



United Kingdom | +44 1422 312562
enquiries@dsthumiditycontrol.co.uk
www.dsthumiditycontrol.co.uk