

NR-475 Hire Chiller

NR-375 Hire Chiller

Product Overview

Robust design – Specifically designed for demanding process cooling applications

Ecodesign compliant – all models fully comply with ErP2021 – SEPR HT (EU) 2016/2281 – SEPR MT (EU) 2015/1095

Wide operating range – operates in ambient temperatures from +45°C down to -10°C with cooling fluid supply temperatures between +20°C and -10°C

Eco-friendly – built around the latest high-efficiency scroll compressors utilising low GWP R454B refrigerant

Shell & tube evaporator – a robust solution providing greater dependability compared to more traditional designs

Coated condenser coils – aluminium microchannel construction results in a smaller refrigerant charge – while epoxy coating offers protection in potentially aggressive environments

Dual independent refrigeration circuits – additional resilience provides greater peace of mind

Isolation valves & strainers – fitted to fluid connections



Performance Data

Nominal Cooling Capacity (1) 470 kW
Nominal Power Consumption (1) 126 kW
EER (1) 3.73 kW/kW

Operating Limits

Minimum/Maximum Cooling Fluid Flow Rate 44/108 m³/hr

Electrical Data

Power Supply 400/3/50 V/ph/Hz
Power Connections – Hard Wired 120 mm² cables
Maximum Running Current 297 A
Maximum Starting Current 527 A
IP Rating IP54

Cooling Circuit

Refrigerant / Compressor Type R454B/Scroll
Number of Compressors / Circuits / Fans 4/2/6

Hydraulic Circuit

Nominal Cooling Fluid Flow Rate (1) 80.8 m³/hr
Nominal Evaporator Pressure Drop (1) 67 kPa
Connections 4" Flanged

Physical Data

Length (2) 3,905 mm
Width (2) 2,260 mm
Height (2) 2,560 mm
Operating Weight (2) 3,000 kg
Sound Pressure Level (2) 62 dB(A)

(1) Performance data based on operating conditions of +7°C cooling fluid outlet temperature / +12°C cooling fluid inlet temperature / +30°C ambient temperature

(2) Sound pressure at 10m average value obtained in a free field on a reflecting plane at a distance of 10m from the unit, non-binding value calculated from the sound power level

Still have a question?

Get in touch with one of our expert team today.


☎ 01422 371711
✉ sales@newsome.ltd.uk
🌐 www.newsome.ltd.uk






NR-475 Hire Chiller

Cooling Capacity

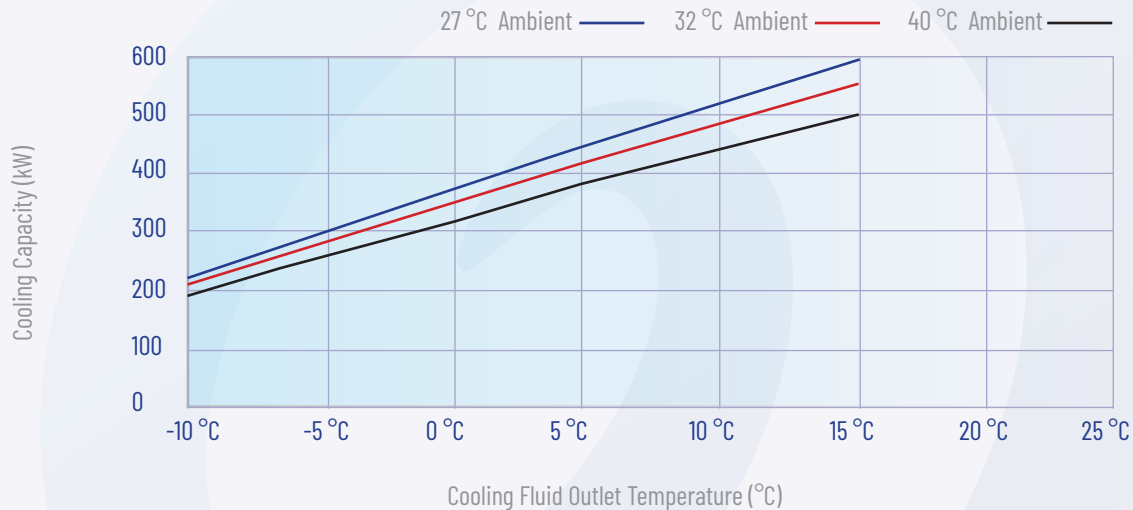

Nominal Running Capacity

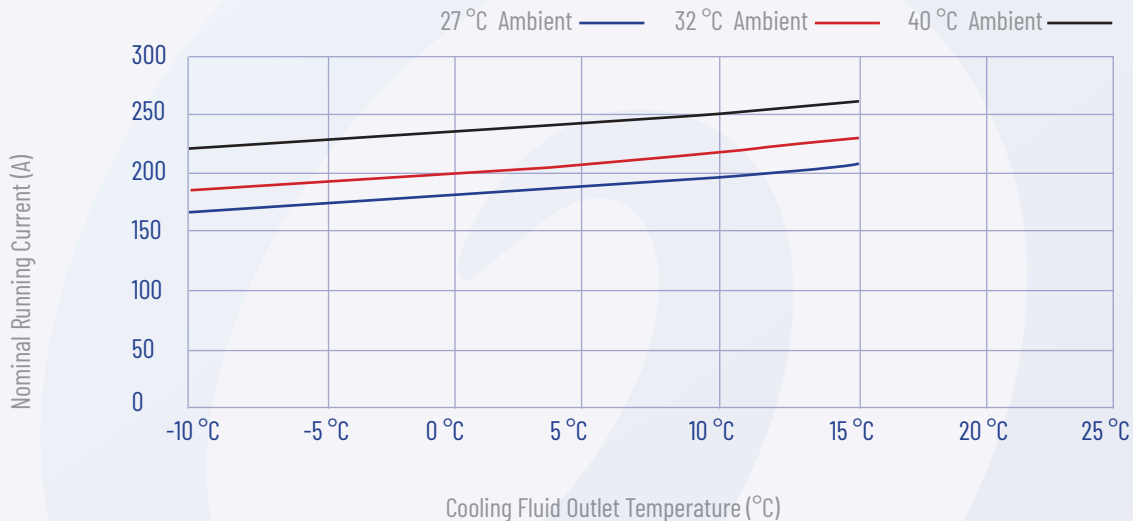

The level of performance provided by each machine depends on the conditions at which it is operating. The two factors determining performance are ambient air temperature and the required cooling fluid outlet temperature. The above graphs illustrate the cooling capacity and nominal running current - at three different operating ambient temperatures - based on differing cooling fluid outlet temperatures

