

NR-HP200 Heat Pump

NR-HP200

Product Overview

Reversible – Designed for a complete range of heating & cooling applications – both comfort and industrial process

Ecodesign compliant – all models fully comply with minimum efficiency directive (EU) 813/2013

Wide operating range – capable of hot water production of up to +55°C in most conditions – or up to +42°C while operating in minimum ambient condition of -15°C

Eco-friendly – built around the latest high-efficiency scroll compressors utilising low GWP R454B refrigerant

Shell & tube evaporator – a robust solution providing greater dependability compared to more traditional designs

Dual independent refrigeration circuits – additional resilience provides greater peace of mind

Isolation valves & strainers – fitted to fluid connections



Performance Data

Performance Data - Heating

Nominal Heating Capacity (1)	163 kW
Nominal Power Consumption (1)	52.0 kW
COP (1)	3.14 kW/kW

Performance Data - Cooling

Nominal Heating Capacity (2)	165 kW
Nominal Power Consumption (2)	49.2 kW
EER (2)	3.35 kW/kW

Operating Limits

Minimum/Maximum Heating/Cooling Fluid Flow Rate	17/46 m³/hr
---	-------------

Electrical Data

Power Supply	400/3/50 V/ph/Hz
Power Connections – Hard Wired	70 mm² cables
Maximum Running Current	133 A
Maximum Starting Current	301 A
IP Rating	IP54

Cooling Circuit

Refrigerant / Compressor Type	R454B/Scroll
Number of Compressors / Circuits / Fans	4/2/4

Hydraulic Circuit

Nominal Heating Fluid Flow Rate (1)	28.3 m³/hr
Nominal Heat Exchanger Pressure Drop (1)	23 kPa
Connections	4" Flanged

Physical Data

Length (2)	3,110 mm
Width (2)	2,220 mm
Height (2)	2,150 mm
Operating Weight (2)	2,000 kg
Sound Pressure Level (2)	73 dB(A)

(1) Heating performance data based on operating conditions of +45°C heating fluid outlet temperature / +40°C cooling fluid inlet temperature / +7°C ambient temperature

(2) Cooling performance data based on operating conditions of +7°C cooling fluid outlet temperature / +12°C cooling fluid inlet temperature / +30°C ambient temperature

(3) Sound pressure at 1m average value obtained in a free field on a reflecting plane at a distance of 10m from the unit, non-binding value calculated from the sound power level

Still have a question?

Get in touch with one of our expert team today.


- ☎ 01422 371711
- ✉ sales@newsome.ltd.uk
- 🌐 www.newsome.ltd.uk






NR-HP200 Heat Pump

Heating Capacity

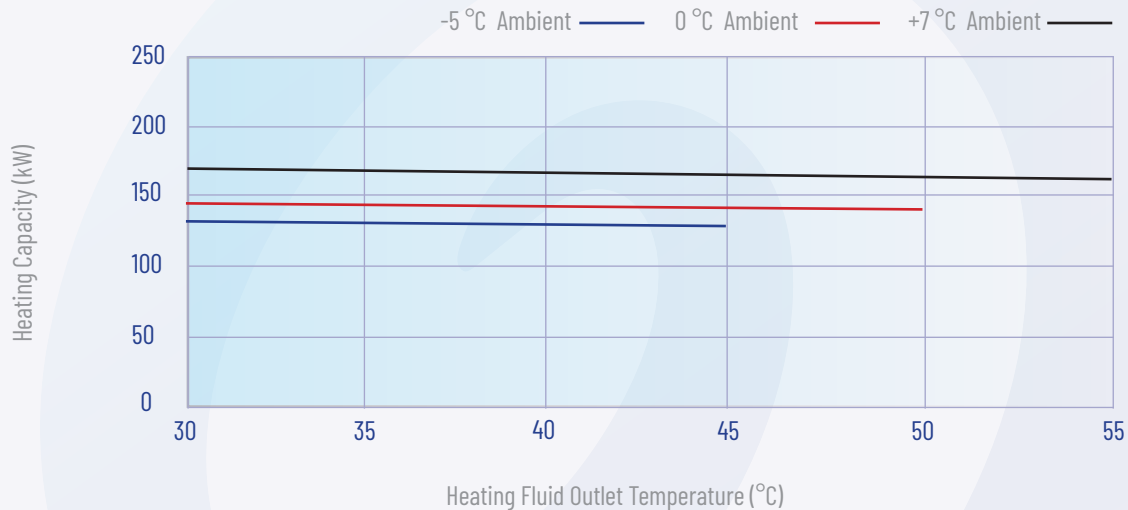


Nominal Running Capacity - Heating

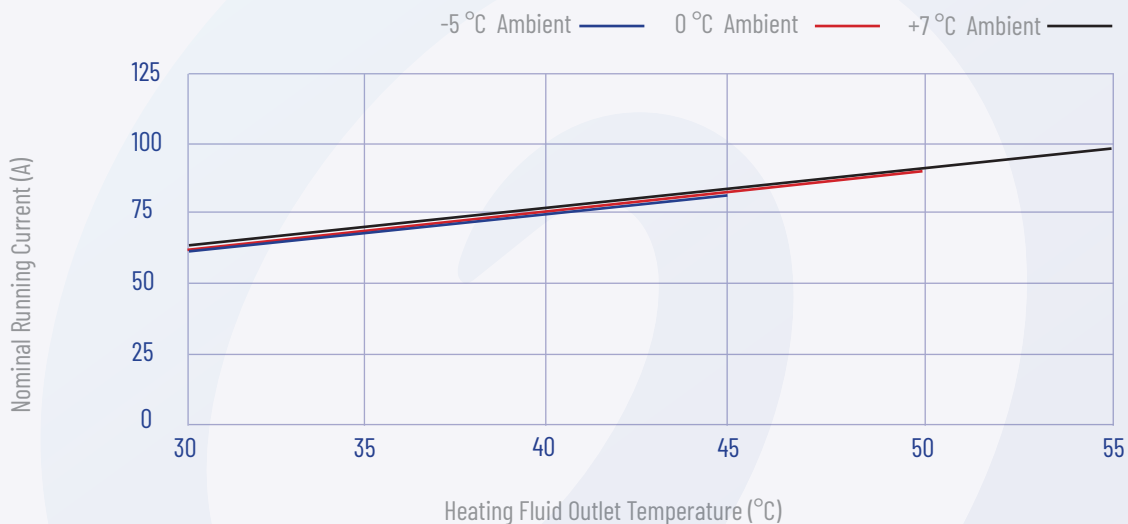




NR-HP200 Heat Pump

Cooling Capacity

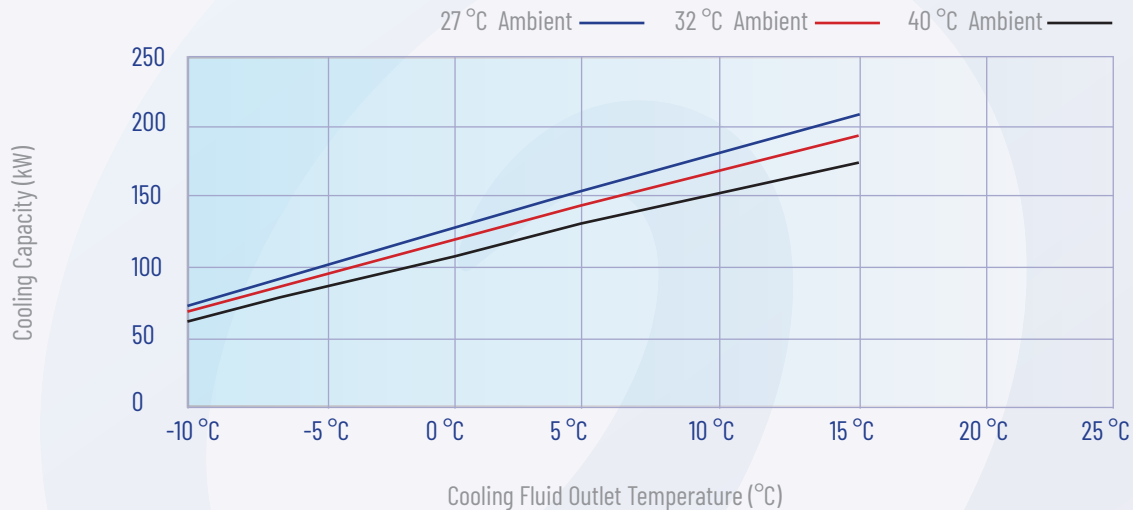

Nominal Running Capacity - Cooling

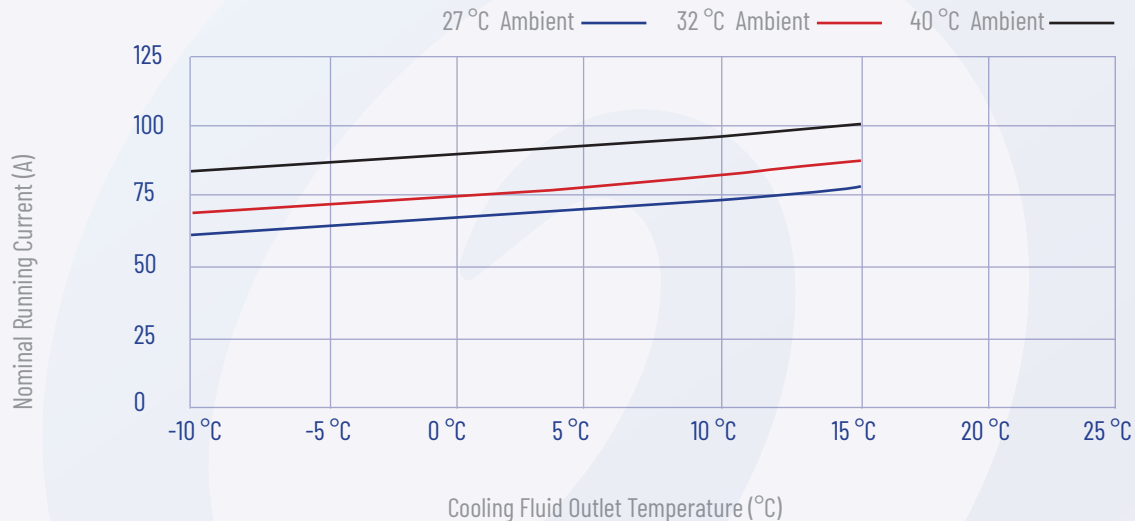

The level of performance provided by each machine depends on the conditions at which it is operating. The two factors determining performance are ambient air temperature and the required heating / cooling fluid outlet temperature. The above graphs illustrate the heating / cooling capacities and nominal running current - at three different operating ambient temperatures - based on differing fluid outlet temperatures.

